

QTERM®-G58



3.5" Ultra-rugged, Wireless, Handheld HMI

The battery-powered QTERM-G58 is a rugged handheld human machine interface terminal with a sunlight readable display with touch screen, optional 802.11b/g wireless Ethernet and Qlarity® object-based programming language.



Product Highlights

- ▶ 320 x 240 pixel, 3.5" (89 mm) diagonal, sunlight-readable, LED lighted, TFT color LCD touch screen display
- ▶ Optional 802.11b/g wireless Ethernet
- ▶ Internal lithium polymer rechargeable battery
- ▶ NEMA-4 rated, CE Certified
- ▶ Qlarity object-based programming language

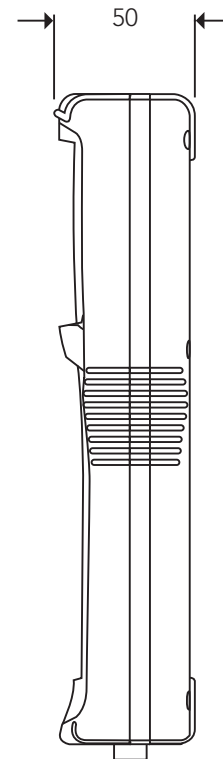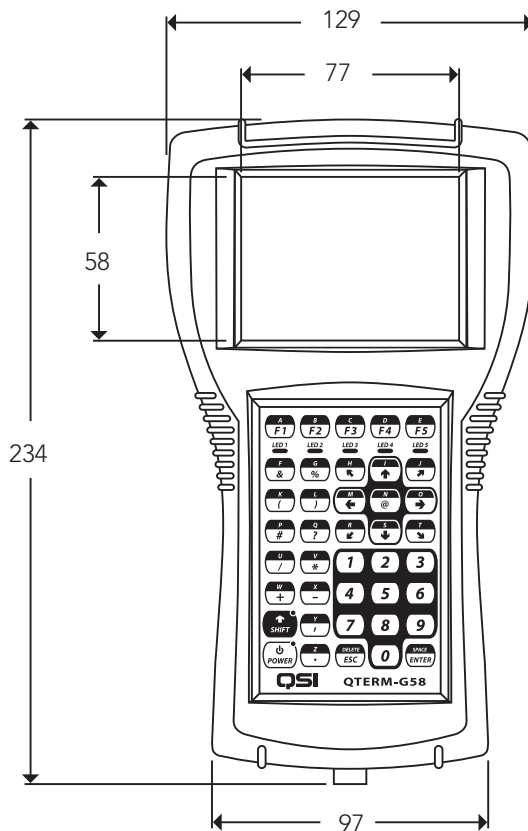

Dimensions shown in mm.

QTERM-G58 Specifications

Feature	Detail	Description
Display	Type	320 x 240 transfective sunlight readable, TFT color LCD
	Size	3.5" (89 mm) diagonal
	Lighting	LED
Touch Screen	Type	Analog-resistive
Keypad	Number of Keys	24-key standard, 40-key optional
	Construction	Steel snap domes in membrane, 4 or 5 programmable LEDs, Power and Shift LEDs
	Options	Electroluminescent lighting, prototype and custom legends available
Interface	Serial Multiport	EIA-232/422/485 serial multiprotocol port
	USB	2.0 full speed device port for mass storage access
	Connectors	12-pin round (Hirose HR30) sealed push-lock circular connector
	Wireless (optional)	802.11b/g Dual Antenna
Processor	Type	Atmel ARM9 200 MHz
Memory	RAM	64 MB SDRAM
	Flash	256 MB
Realtime Clock	Standard	Battery-backed, 1 second resolution
Audio	Speaker	1 W 8 Ω Sealed, 83 dB nominal at 100 mm, 1 W input power
	Audio Decoder	Single channel digital decoder for .wav files
	Other	Standard beep, software controllable in duration and pitch
Power	Input	8 to 32 VDC
	Battery	Internal lithium polymer rechargeable battery pack; 10 hr active life, 3 hr recharge time
Mechanical	Type	Handheld
	Size	129 (W) x 234 (H) x 50 (D) mm
	Mass	665 g
	Housing Material	ABS polycarbonate with rubber overmold
	Colors	Available in gray, black or blue

Environmental	Sealing	NEMA-4
	Temperature	Operating: -20 to 60 °C; Storage: -30 to 70 °C
	Humidity	0 to 95%, non-condensing
	Vibration	4 g 5-2000 Hz
	Shock	40 g, 11 ms, any axis
	Drop	1.5 m onto concrete
Certifications	CE	EN55022, EN55024 and EN60950
	EMC	FCC Part 15, Subpart B, ICES-003

Software	Operating System	Qlarity®
	Development Environments	Qlarity Foundry®



US Office

Beijer Electronics, Inc.
1865 West 2100 South
Salt Lake City, Utah 84119 USA

www.BeijerInc.com / 1-801-466-8770

Headquarters

Beijer Electronics Products AB
Box 426
SE-201 24 Malmö, Sweden

www.BeijerElectronics.com / +46 40 35 86 00

M01-017-00 REV 06
19 MARCH 2014

Copyright © 2014 Beijer Electronics. All rights reserved.

The information at hand is provided as available at the time of printing. Beijer Electronics reserves the right to change any information without updating this publication. Beijer Electronics does not assume any responsibility for any errors or omissions in this publication.